





PORTA-MACHOS DE CAMBIO RÁPIDO CON DOBLE COMPENSACIÓN

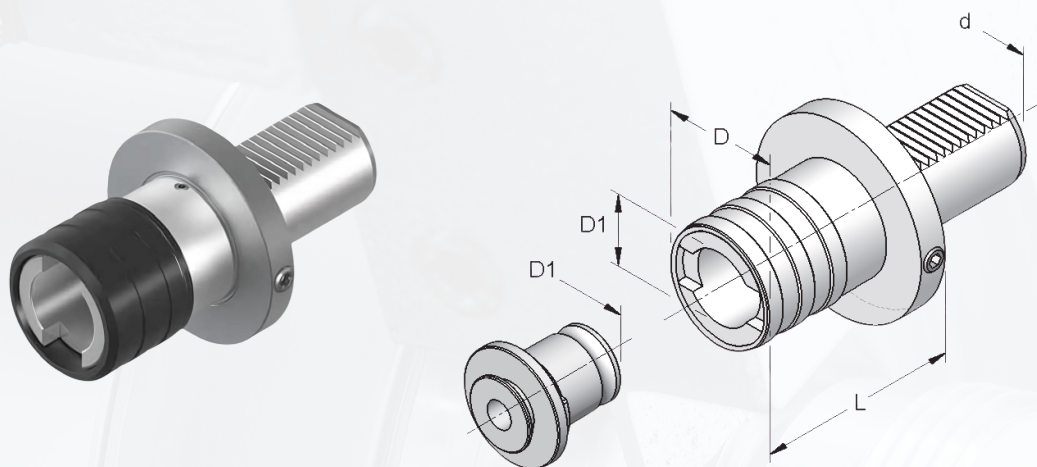

Nº Art.	TIPO	d	L	D	D1	Compensación		
5760	VDI20 - B.1	20	55	38	19	-9 + 9	M3 - M12	(* M 18)
5780	VDI30 - B.1	30	55	38	19	-9 + 9	M3 - M12	(* M 18)
5781	VDI30 - B.2	30	77	55	31	-15 + 15	M6 - M20	(* M 30)
5782	VDI40 - B.1	40	55	38	19	-9 + 9	M3 - M12	(* M 18)
5783	VDI40 - B.2	40	77	55	31	-15 + 15	M6 - M20	(* M 30)
5784	VDI40 - B.3	40	120	79	48	-24 + 24	M14 - M33	(* M 48)
5793	VDI50 - B.2	50	77	55	31	-15 + 15	M6 - M20	(* M 30)
5794	VDI50 - B.3	50	108	79	48	-24 + 24	M14 - M33	(* M 48)

BARRAS DE PRUEBA

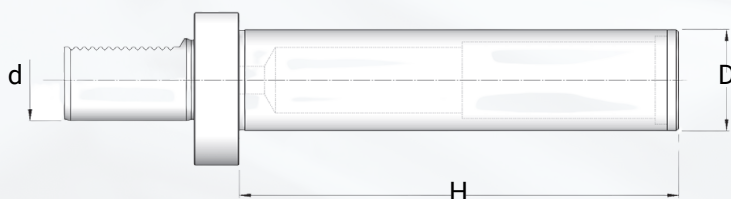

Nº Art.	TIPO	d	D	H
7895	VDI 20	20	30	220
7896	VDI 30	30	40	230
7897	VDI 40	40	50	300
7898	VDI 50	50	50	300
7899	VDI 60	60	60	300

CARACTERÍSTICAS:

- Fabricadas en acero para cementación certificado
- Cementadas con una profundidad de 0,6 - 0,8 mm
- Temple, revenido y bruñido
- Dureza HRC 58 ± 2, resistencia 800–1000 N/mm²
- Desviación radial (concentricidad) 0,005 mm
- Cilindricidad 0,003 mm