




Garras blandas de aluminio Paso 1.5 mm x 60°

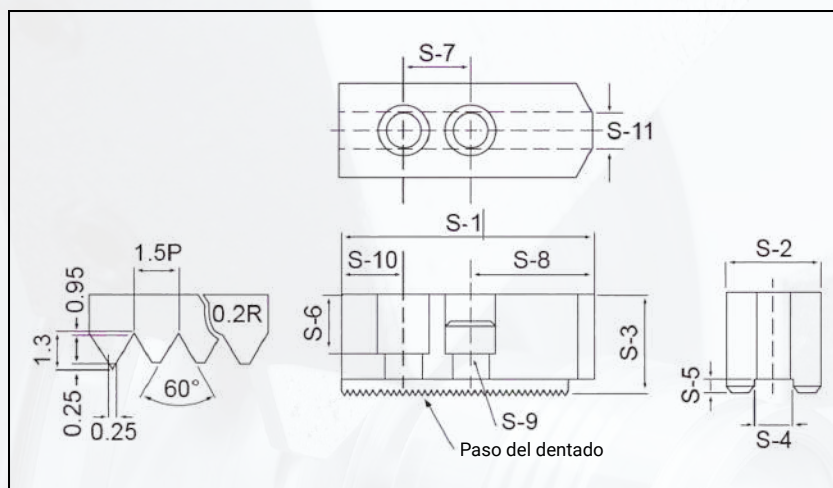

Modelo	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentado	Ángulo	Peso bruto (kg)
GB-A06030B	73	31	31	12	5	19	20	38	M10	15	13	1.5×60°	Estándar	0,48
GB-A08037B	95	35	37	14	5	22	25	46	M12	24	15	1.5×60°	Estándar	0,84
GB-A10042B	110	40	42	16	5	27	30	50	M12	30	17	1.5×60°	Estándar	1,32
GB-A12048B-21	129	48	48	21	5	28	30	60	M16	39	22	1.5×60°	Estándar	2,04
GB-A12048B-18	129	48	48	18	5	28	30	60	M14	39	22	1.5×60°	Estándar	2,04

Modelo	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentado	Ángulo	Peso bruto (kg)
GB-A04023C	51	23	23	10	4	13	14	27	M8	10	3	1.5×60°	120° Punta	0,1
GB-A05027C	62	23	27	10	4	17	14	38	M8	10	3	1.5×60°	120° Punta	0,2
GB-A06030C	73	31	31	12	5	19	20	43	M10	10	3	1.5×60°	120° Punta	0,46
GB-A08037C	95	35	37	14	5	22	25	54	M12	16	3	1.5×60°	120° Punta	0,82
GB-A10042C	110	40	42	16	5	27	30	60	M12	20	4	1.5×60°	120° Punta	1,29
GB-A12048C-21	129	48	48	21	5	28	30	74	M16	25	3	1.5×60°	120° Punta	2,02
GB-A12048C-18	129	48	48	18	5	28	30	74	M14	25	3	1.5×60°	120° Punta	2,02

Modelo	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentado	Ángulo	Peso bruto (kg)
GB-A06030A	73	31	31	12	5	19	20	38	M10	15	N/A	1.5×60°	Plano	0,49
GB-A08037A	95	35	37	14	5	22	25	46	M12	24	N/A	1.5×60°	Plano	0,85
GB-A10042A	110	40	42	16	5	27	30	50	M12	30	N/A	1.5×60°	Plano	1,33
GB-A12048A-21	129	48	48	21	5	28	30	60	M16	39	N/A	1.5×60°	Plano	2,05
GB-A12048A-18	129	48	48	18	5	28	30	60	M14	39	N/A	1.5×60°	Plano	2,05
GB-A15062A-22	165	62	62	22	8	37	43	85	M20	37	N/A	1.5×60°	Plano	5,35
GB-A15062A-25.5	165	62	62	25,5	8	37	43	85	M20	37	N/A	1.5×60°	Plano	5,35
GB-A18062A-22	165	62	62	22	8	37	43	85	M20	37	N/A	1.5×60°	Plano	5,35
GB-A18062A-25.5	165	62	62	25,5	8	37	43	85	M20	37	N/A	1.5×60°	Plano	5,35

• Material: AL 6061 T6