




Garras blandas extra altas Paso 1.5 mm x 60°

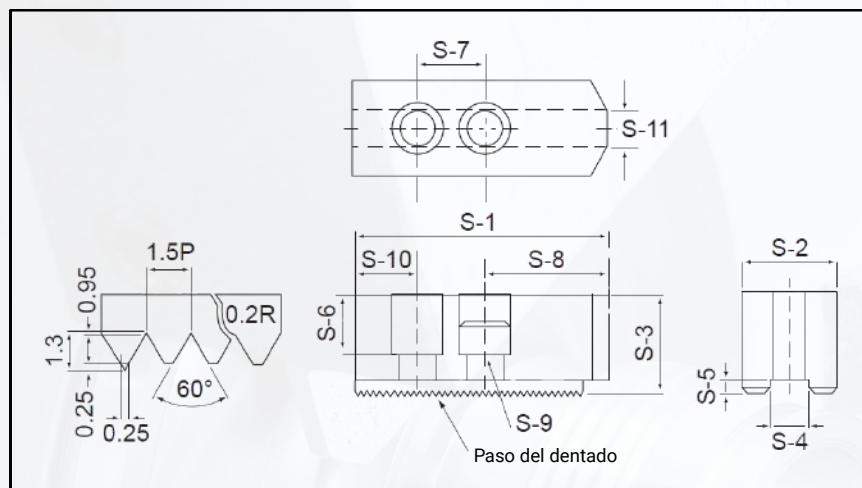


Modelo (4")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentedado	Ángulo	Peso bruto (kg)
GB04023C	51	23	23	10	4	13	14	27	M8	10	3	1.5x60°	120° Punta	0,5
GB04036C	51	23	36	10	4	26	14	27	M8	10	3	1.5x60°	120° Punta	0,8
GB04048C	51	23	48	10	4	38	14	27	M8	10	3	1.5x60°	120° Punta	1

Modelo (5")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentedado	Ángulo	Peso bruto (kg)
GB0527C	62	23	27	10	4	17	14	38	M8	10	3	1.5x60°	120° Punta	0,6
GB05036C	62	23	36	10	4	26	14	38	M8	10	3	1.5x60°	120° Punta	0,9
GB05048C	62	23	48	10	4	38	14	38	M8	10	3	1.5x60°	120° Punta	1,1
GB05070C	62	23	70	10	4	60	14	38	M8	10	3	1.5x60°	120° Punta	1,5
GB05100C	62	23	100	10	4	90	14	38	M8	10	3	1.5x60°	120° Punta	2,5

Modelo (6")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentedado	Ángulo	Peso bruto (kg)
GB06030B	73	31	31	12	5	19	20	38	M10	15	13	1.5x60°	Estándar	1,28
GB06036B	73	31	36	12	5	24	20	38	M10	15	13	1.5x60°	Estándar	1,4
GB06050B	73	31	50	12	5	38	20	38	M10	15	13	1.5x60°	Estándar	1,9
GB06060B	73	31	60	12	5	48	20	38	M10	15	13	1.5x60°	Estándar	2,4
GB06070B	73	31	70	12	5	58	20	38	M10	15	13	1.5x60°	Estándar	2,9
GB06080B	73	31	80	12	5	68	20	38	M10	15	13	1.5x60°	Estándar	3,3
GB06090B	73	31	90	12	5	78	20	38	M10	15	13	1.5x60°	Estándar	3,7
GB06100B	73	31	100	12	5	88	20	38	M10	15	13	1.5x60°	Estándar	4,16
GB06130B	73	31	130	12	5	118	20	38	M10	15	13	1.5x60°	Estándar	5,36
GB06150B	73	31	150	12	5	138	20	38	M10	15	13	1.5x60°	Estándar	6,18



Garras blandas extra altas Paso 1.5 mm x 60°

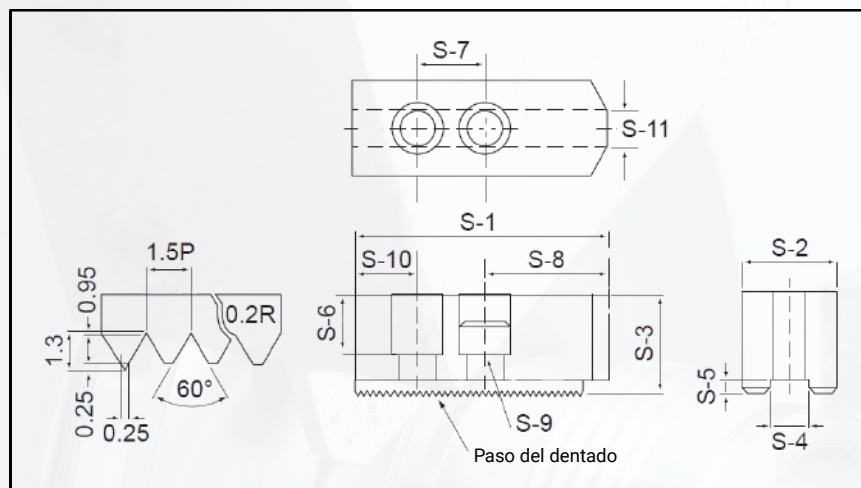


Modelo (6")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentado	Ángulo	Peso bruto (kg)
GB06030C	73	31	31	12	5	19	20	43	M10	10	3	1.5x60°	120° Punta	1,27
GB06036C	73	31	36	12	5	24	20	43	M10	10	3	1.5x60°	120° Punta	1,38
GB06050C	73	31	50	12	5	38	20	43	M10	10	3	1.5x60°	120° Punta	1,88
GB06060C	73	31	60	12	5	48	20	43	M10	10	3	1.5x60°	120° Punta	2,38
GB06070C	73	31	70	12	5	58	20	43	M10	10	3	1.5x60°	120° Punta	2,88
GB06080C	73	31	80	12	5	68	20	43	M10	10	3	1.5x60°	120° Punta	3,27
GB06090C	73	31	90	12	5	78	20	43	M10	10	3	1.5x60°	120° Punta	3,66
GB06100C	73	31	100	12	5	88	20	43	M10	10	3	1.5x60°	120° Punta	4,08

Modelo (6")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentado	Ángulo	Peso bruto (kg)
GB06030A	73	31	31	12	5	19	20	38	M10	15		1.5x60°	Plano	1,29
GB06036A	73	31	36	12	5	24	20	38	M10	15		1.5x60°	Plano	1,42
GB06050A	73	31	50	12	5	38	20	38	M10	15		1.5x60°	Plano	1,92
GB06060A	73	31	60	12	5	48	20	38	M10	15		1.5x60°	Plano	2,42
GB06070A	73	31	70	12	5	58	20	38	M10	15		1.5x60°	Plano	2,93
GB06080A	73	31	80	12	5	68	20	38	M10	15		1.5x60°	Plano	3,33
GB06090A	73	31	90	12	5	78	20	38	M10	15		1.5x60°	Plano	3,74
GB06100A	73	31	100	12	5	88	20	38	M10	15		1.5x60°	Plano	4,2



Garras blandas extra altas Paso 1.5 mm x 60°

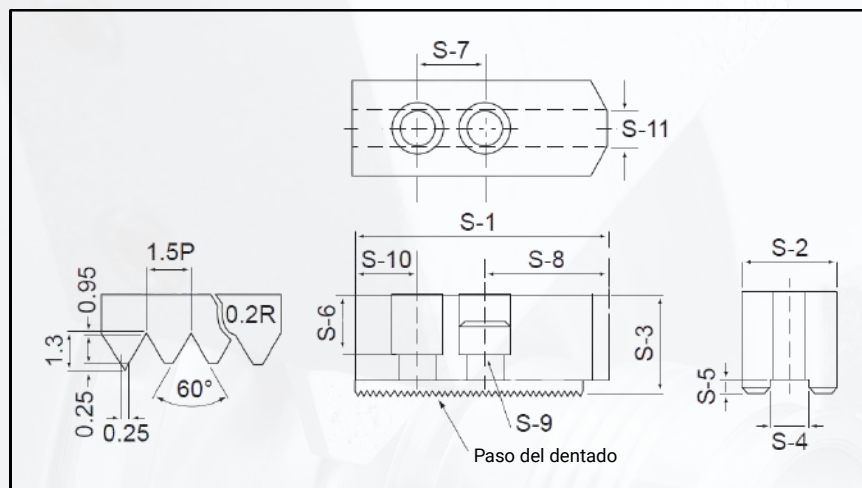


Modelo (8")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentado	Ángulo	Peso bruto (kg)
GB08037B	95	35	37	14	5	22	25	46	M12	24	15	1.5x60°	Estándar	2,34
GB08050B	95	35	50	14	5	35	25	46	M12	24	15	1.5x60°	Estándar	3,06
GB08060B	95	35	60	14	5	45	25	46	M12	24	15	1.5x60°	Estándar	3,66
GB08070B	95	35	70	14	5	55	25	46	M12	24	15	1.5x60°	Estándar	4,36
GB08080B	95	35	80	14	5	65	25	46	M12	24	15	1.5x60°	Estándar	5,06
GB08090B	95	35	90	14	5	75	25	46	M12	24	15	1.5x60°	Estándar	5,71
GB08100B	95	35	100	14	5	85	25	46	M12	24	15	1.5x60°	Estándar	6,36
GB08120B	95	35	120	14	5	105	25	46	M12	24	15	1.5x60°	Estándar	7,6
GB08150B	95	35	150	14	5	135	25	46	M12	24	15	1.5x60°	Estándar	9,44
GB08180B	95	35	180	14	5	165	25	46	M12	24	15	1.5x60°	Estándar	11,2
GB08210B	95	35	210	14	5	195	25	46	M12	24	15	1.5x60°	Estándar	13,1

Modelo (8")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentado	Ángulo	Peso bruto (kg)
GB08037C	95	35	37	14	5	22	25	54	M12	16	3	1.5x60°	120° Punta	2,32
GB08050C	95	35	50	14	5	35	25	54	M12	16	3	1.5x60°	120° Punta	3,04
GB08060C	95	35	60	14	5	45	25	54	M12	16	3	1.5x60°	120° Punta	3,63
GB08070C	95	35	70	14	5	55	25	54	M12	16	3	1.5x60°	120° Punta	4,28
GB08080C	95	35	80	14	5	65	25	54	M12	16	3	1.5x60°	120° Punta	4,96
GB08090C	95	35	90	14	5	75	25	54	M12	16	3	1.5x60°	120° Punta	5,61
GB08100C	95	35	100	14	5	85	25	54	M12	16	3	1.5x60°	120° Punta	5,26
GB08120C	95	35	120	14	5	105	25	54	M12	16	3	1.5x60°	120° Punta	7,42
GB08150C	95	35	150	14	5	135	25	54	M12	16	3	1.5x60°	120° Punta	9,24



Garras blandas extra altas Paso 1.5 mm x 60°

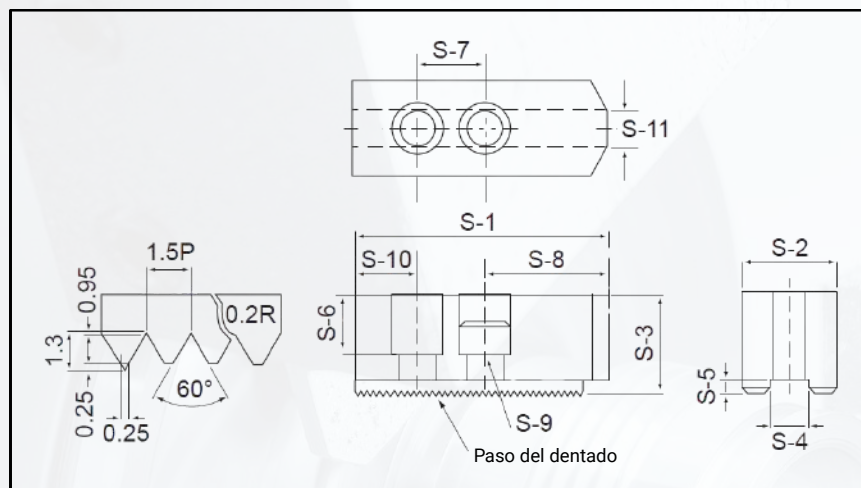


Modelo (8")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentado	Ángulo	Peso bruto (kg)
GB08037A	95	35	37	14	5	22	25	46	M12	24	N/A	1.5×60°	Plano	2,35
GB08050A	95	35	50	14	5	35	25	46	M12	24	N/A	1.5×60°	Plano	3,08
GB08060A	95	35	60	14	5	45	25	46	M12	24	N/A	1.5×60°	Plano	3,71
GB08070A	95	35	70	14	5	55	25	46	M12	24	N/A	1.5×60°	Plano	4,44
GB08080A	95	35	80	14	5	65	25	46	M12	24	N/A	1.5×60°	Plano	5,16
GB08090A	95	35	90	14	5	75	25	46	M12	24	N/A	1.5×60°	Plano	5,86
GB08100A	95	35	100	14	5	85	25	46	M12	24	N/A	1.5×60°	Plano	6,56

Modelo (10")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentado	Ángulo	Peso bruto (kg)
GB10042B	110	40	42	16	5	27	30	50	M12	30	17	1.5×60°	Estándar	3.66
GB10050B	110	40	50	16	5	35	30	50	M12	30	17	1.5×60°	Estándar	4.40
GB10060B	110	40	60	16	5	45	30	50	M12	30	17	1.5×60°	Estándar	5.24
GB10070B	110	40	70	16	5	55	30	50	M12	30	17	1.5×60°	Estándar	6.08
GB10080B	110	40	80	16	5	65	30	50	M12	30	17	1.5×60°	Estándar	7.04
GB10090B	110	40	90	16	5	75	30	50	M12	30	17	1.5×60°	Estándar	7.92
GB10100B	110	40	100	16	5	85	30	50	M12	30	17	1.5×60°	Estándar	8.80
GB10120B	110	40	120	16	5	105	30	50	M12	30	17	1.5×60°	Estándar	10.56
GB10150B	110	40	150	16	5	135	30	50	M12	30	17	1.5×60°	Estándar	13.14
GB10180B	110	40	180	16	5	165	30	50	M12	30	17	1.5×60°	Estándar	15.82
GB10200B	110	40	200	16	5	185	30	50	M12	30	17	1.5×60°	Estándar	17.58
GB10220B	110	40	220	16	5	205	30	50	M12	30	17	1.5×60°	Estándar	19.14



Garras blandas extra altas Paso 1.5 mm x 60°

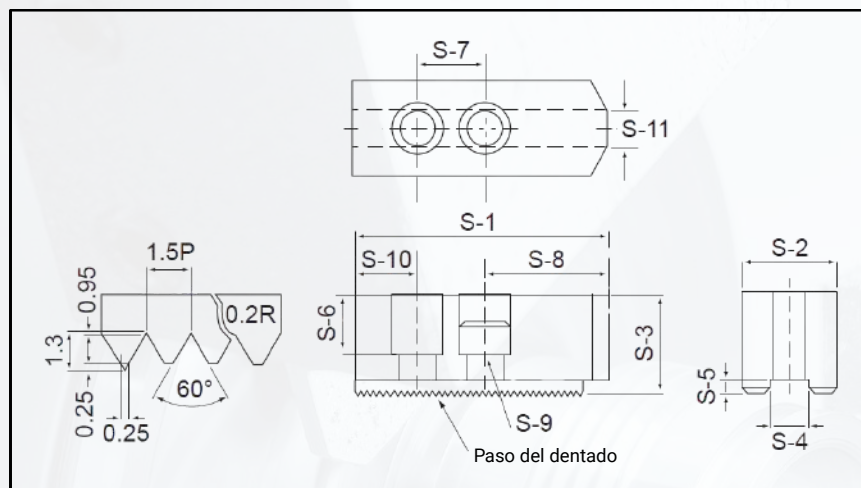


Modelo (10")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentado	Ángulo	Peso bruto (kg)
GB10042C	110	40	42	16	5	27	30	60	M12	20	4	1.5×60°	120° Punta	3.64
GB10050C	110	40	50	16	5	35	30	60	M12	20	4	1.5×60°	120° Punta	4.30
GB10060C	110	40	60	16	5	45	30	60	M12	20	4	1.5×60°	120° Punta	5.14
GB10070C	110	40	70	16	5	55	30	60	M12	20	4	1.5×60°	120° Punta	5.98
GB10080C	110	40	80	16	5	65	30	60	M12	20	4	1.5×60°	120° Punta	6.94
GB10090C	110	40	90	16	5	75	30	60	M12	20	4	1.5×60°	120° Punta	7.74
GB10100C	110	40	100	16	5	85	30	60	M12	20	4	1.5×60°	120° Punta	8.70
GB10120C	110	40	120	16	5	105	30	60	M12	20	4	1.5×60°	120° Punta	10.36
GB10150C	110	40	150	16	5	135	30	60	M12	20	4	1.5×60°	120° Punta	12.94

Modelo (10")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentado	Ángulo	Peso bruto (kg)
GB10042A	110	40	42	16	5	27	30	50	M12	30	–	1.5×60°	Plano	3.67
GB10050A	110	40	50	16	5	35	30	50	M12	30	–	1.5×60°	Plano	4.45
GB10060A	110	40	60	16	5	45	30	50	M12	30	–	1.5×60°	Plano	5.31
GB10070A	110	40	70	16	5	55	30	50	M12	30	–	1.5×60°	Plano	6.18
GB10080A	110	40	80	16	5	65	30	50	M12	30	–	1.5×60°	Plano	7.22
GB10090A	110	40	90	16	5	75	30	50	M12	30	–	1.5×60°	Plano	8.10
GB10100A	110	40	100	16	5	85	30	50	M12	30	–	1.5×60°	Plano	8.98



Garras blandas extra altas Paso 1.5 mm x 60°

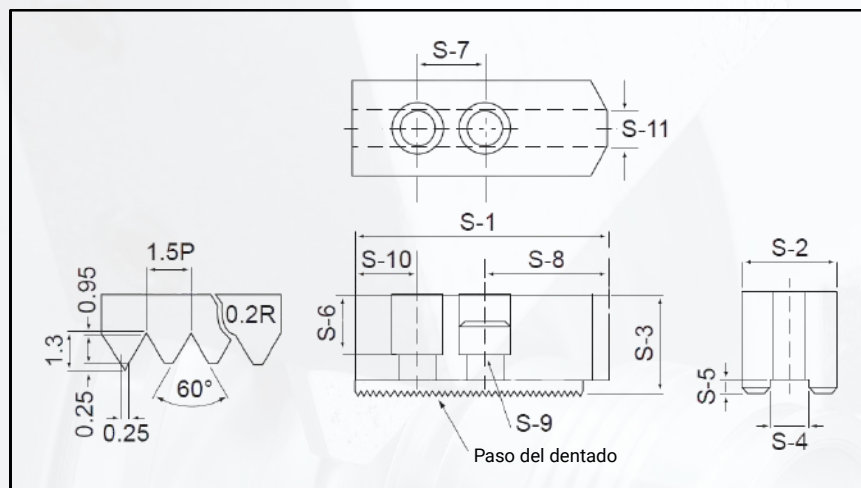


Modelo (12")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentado	Ángulo	Peso bruto (kg)
GB12048B-21	129	48	48	21	5	28	30	60	M16	39	22	1.5×60°	Estándar	5.78
GB12060B-21	129	48	60	21	5	40	30	60	M16	39	22	1.5×60°	Estándar	7.44
GB12080B-21	129	48	80	21	5	60	30	60	M16	39	22	1.5×60°	Estándar	9.10
GB12100B-21	129	48	100	21	5	80	30	60	M16	39	22	1.5×60°	Estándar	11.80
GB12120B-21	129	48	120	21	5	100	30	60	M16	39	22	1.5×60°	Estándar	14.20
GB12150B-21	129	48	150	21	5	130	30	60	M16	39	22	1.5×60°	Estándar	17.82
GB12180B-21	129	48	180	21	5	160	30	60	M16	39	22	1.5×60°	Estándar	22.65
GB12200B-21	129	48	200	21	5	180	30	60	M16	39	22	1.5×60°	Estándar	24.82
GB12220B-21	129	48	220	21	5	200	30	60	M16	39	22	1.5×60°	Estándar	27.32

Modelo (12")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentado	Ángulo	Peso bruto (kg)
GB12048C-21	129	48	48	21	5	28	30	74	M16	25	3	1.5×60°	120° Punta	5.76
GB12060C-21	129	48	60	21	5	40	30	74	M16	25	3	1.5×60°	120° Punta	7.04
GB12080C-21	129	48	80	21	5	60	30	74	M16	25	3	1.5×60°	120° Punta	9.20
GB12100C-21	129	48	100	21	5	80	30	74	M16	25	3	1.5×60°	120° Punta	11.60
GB12120C-21	129	48	120	21	5	100	30	74	M16	25	3	1.5×60°	120° Punta	13.95
GB12150C-21	129	48	150	21	5	130	30	74	M16	25	3	1.5×60°	120° Punta	17.57

Modelo (12")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentado	Ángulo	Peso bruto (kg)
GB12048A-21	129	48	48	21	5	28	30	60	M16	39	–	1.5×60°	Plano	5.79
GB12060A-21	129	48	60	21	5	40	30	60	M16	39	–	1.5×60°	Plano	7.24
GB12080A-21	129	48	80	21	5	60	30	60	M16	39	–	1.5×60°	Plano	9.60
GB12100A-21	129	48	100	21	5	80	30	60	M16	39	–	1.5×60°	Plano	12.10



Garras blandas extra altas Paso 1.5 mm x 60°

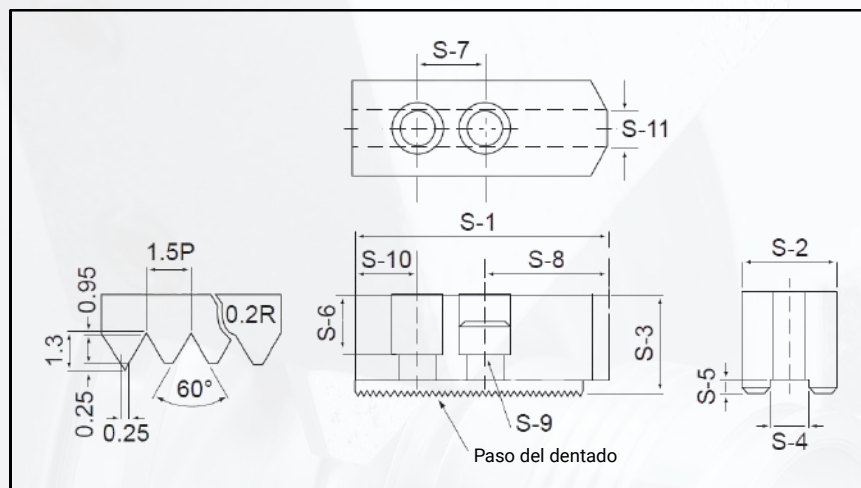


Modelo (12")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentado	Ángulo	Peso bruto (kg)
GB12048B-18	129	48	48	18	5	28	30	60	M14	39	22	1.5×60°	Estándar	5.78
GB12060B-18	129	48	60	18	5	40	30	60	M14	39	22	1.5×60°	Estándar	7.14
GB12080B-18	129	48	80	18	5	60	30	60	M14	39	22	1.5×60°	Estándar	9.40
GB12100B-18	129	48	100	18	5	80	30	60	M14	39	22	1.5×60°	Estándar	11.80
GB12120B-18	129	48	120	18	5	100	30	60	M14	39	22	1.5×60°	Estándar	14.20
GB12150B-18	129	48	150	18	5	130	30	60	M14	39	22	1.5×60°	Estándar	17.82
GB12180B-18	129	48	180	18	5	160	30	60	M14	39	22	1.5×60°	Estándar	22.65
GB12200B-18	129	48	200	18	5	180	30	60	M14	39	22	1.5×60°	Estándar	24.82
GB12220B-18	129	48	220	18	5	200	30	60	M14	39	22	1.5×60°	Estándar	27.32

Modelo (12")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentado	Ángulo	Peso bruto (kg)
GB12048C-18	129	48	48	18	5	28	30	74	M14	25	3	1.5×60°	120° Punta	5.76
GB12060C-18	129	48	60	18	5	40	30	74	M14	25	3	1.5×60°	120° Punta	7.04
GB12080C-18	129	48	80	18	5	60	30	74	M14	25	3	1.5×60°	120° Punta	9.20
GB12100C-18	129	48	100	18	5	80	30	74	M14	25	3	1.5×60°	120° Punta	11.80
GB12120C-18	129	48	120	18	5	100	30	74	M14	25	3	1.5×60°	120° Punta	13.95
GB12150C-18	129	48	150	18	5	130	30	74	M14	25	3	1.5×60°	120° Punta	17.57

Modelo (12")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	S-11	Paso del dentado	Ángulo	Peso bruto (kg)
GB12048A-18	129	48	48	18	5	28	30	60	M14	39	–	1.5×60°	Plano	5.79
GB12060A-18	129	48	60	18	5	40	30	60	M14	39	–	1.5×60°	Plano	7.24
GB12080A-18	129	48	80	18	5	60	30	60	M14	39	–	1.5×60°	Plano	9.60
GB12100A-18	129	48	100	18	5	80	30	60	M14	39	–	1.5×60°	Plano	12.10



Garras blandas extra altas Paso 1.5 mm x 60°

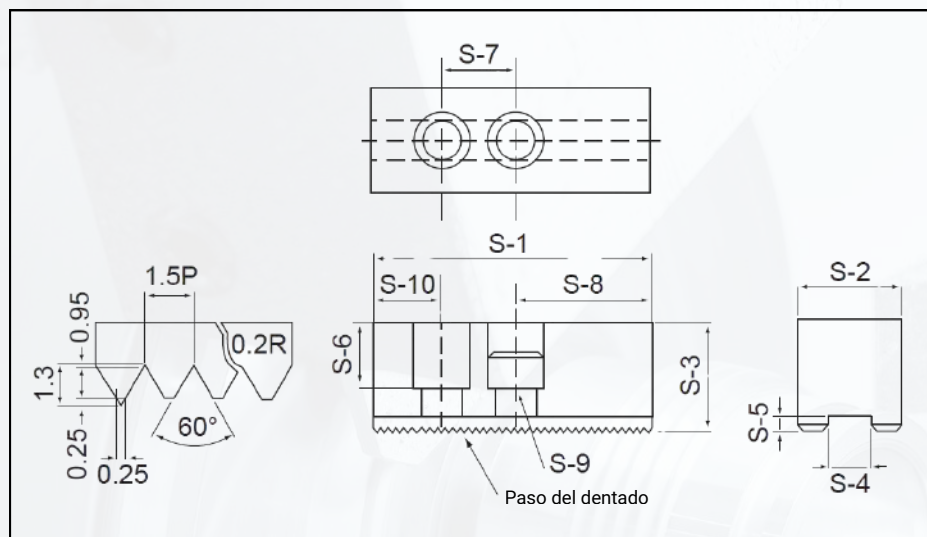

Modelo (15")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	Paso del dentado	Ángulo	Peso bruto (kg)
GB15062A-22	165	62	62	22	8	37	43	85	M20	37	1.5×60°	Plano	12.6
GB15080A-22	165	62	80	22	8	55	43	85	M20	37	1.5×60°	Plano	16.14
GB15100A-22	165	62	100	22	8	75	43	85	M20	37	1.5×60°	Plano	20.5
GB15130A-22	165	62	130	22	8	105	43	85	M20	37	1.5×60°	Plano	26.1
GB15150A-22	165	62	150	22	8	125	43	85	M20	37	1.5×60°	Plano	31.1
GB15180A-22	165	62	180	22	8	155	43	85	M20	37	1.5×60°	Plano	36.58
GB15220A-22	165	62	220	22	8	195	43	85	M20	37	1.5×60°	Plano	45.4

Modelo (15")	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	S-10	Paso del dentado	Ángulo	Peso bruto (kg)
GB15062A-25.5	165	62	62	25.5	8	37	43	85	M20	37	1.5×60°	Plano	12.6
GB15080A-25.5	165	62	80	25.5	8	55	43	85	M20	37	1.5×60°	Plano	16.14
GB15100A-25.5	165	62	100	25.5	8	75	43	85	M20	37	1.5×60°	Plano	20.5
GB15130A-25.5	165	62	130	25.5	8	105	43	85	M20	37	1.5×60°	Plano	26.1
GB15150A-25.5	165	62	150	25.5	8	125	43	85	M20	37	1.5×60°	Plano	31.1
GB15180A-25.5	165	62	180	25.5	8	155	43	85	M20	37	1.5×60°	Plano	36.58
GB15220A-25.5	165	62	220	25.5	8	195	43	85	M20	37	1.5×60°	Plano	45.4